

Figure 2-55

17.SADDLEBAGS

REMOVAL

1. If equipped with soft bags, remove the 2 mounting bolts and spacers and remove saddlebags.
2. If equipped with hard bags, remove the 3 mounting bolts and spacers and remove saddlebags.

INSTALLATION

1. Remove the two bolts that are on the rear fender brackets, at both positions A and B as seen in Figure 2-55.
2. Place 1/2" spacer at position A and place the larger washer on the 1/2" bolt. Drive 1/2" bolt and washer into position A leaving about 1/4" of space between bolt head and spacer.
3. Place the small washers on the 5/16" bolt and slide the bracket fork, F1, into the 1/4" space on the 1/2" bolt in position A. Lower the saddle bag into position and place 5/16" spacer between the fender bracket and saddle bag bracket at position B. Drive 5/16" bolt and washer through the mounting hole, M1, at position B to mount saddle bag onto fender. Refer to Figures 2-55 and 2-56.
4. Tighten 1/2" bolt at position A and 5/16" bolt at position B.
5. Repeat on otherside of fender with opposite saddle bag.

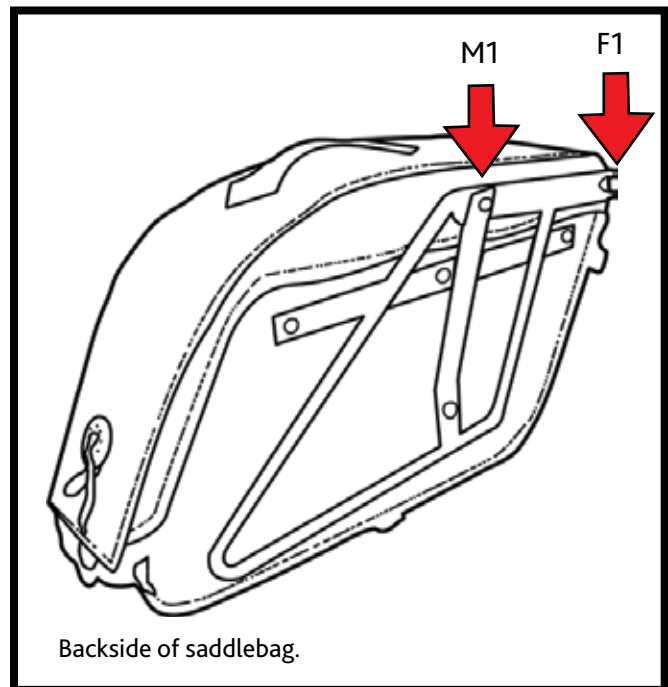


Figure 2-56

Note on next page!

NOTE:

The large washer and 1/2" bolts go in the location closest to the seat, position A. Small washer and 5/16" bolt go in the location closest to the tail lamp, position B.
